

ZGL120032

Zenith



CHARACTERISTIC / CARATTERISTICHE	
Volt	12V
Capacity / Capacità	20h 12Ah
	5h 10.70Ah
Internal Resistance	Full Charged Battery 25°C ≤16mΩ
Capacity affected by Temperature / Effetti delle temperature sulla capacità	40°C 102%
	25°C 100%
	0°C 85%
	-15° 65%
Self-Discharge 25°C Capacity / Autoscarica a 25°C	after 3 month storage 90%
	after 6 month storage 80%
	after 12 month storage 62%
Charge (Costant Voltage 25°C)	Float Volt 13.6 - 13.8V
	Charge Max.3Amp. 14.4 - 15 Volt

CHARACTERISTIC / CARATTERISTICHE			
Battery dimensions / Dimensioni batteria			
L/L	W/P	H/A	Tot - H/A
151	99	95	101
Box Dimensions / Dimensioni scatola			
L/L	W/P	H/A	
325	218	141	
Weight / Peso	3.40Kg		
Terminal / Terminali	F2		
Case / Contenitore	ABS		

Amp. (25°C)

F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	33.00	22.00	16.55	11.00	7.70	6.60	4.13	2.83	1.88	1.27	1.05	0.55
1.65V	32.40	21.60	16.25	10.80	7.56	6.48	4.05	2.78	1.85	1.24	1.03	0.54
1.70V	31.80	21.20	15.95	10.60	7.42	6.36	3.98	2.72	1.82	1.22	1.01	0.53
1.75V	31.20	20.80	15.65	10.40	7.28	6.24	3.90	2.67	1.78	1.20	0.99	0.52
1.80V	30.00	20.00	15.05	10.00	7.00	6.00	3.75	2.57	1.71	1.15	0.95	0.50

Watts (25°C)



F.V/Time	5min	10min	15min	30min	45min	1h	2h	3h	5h	8h	10h	20h
1.60V	63.53	42.35	31.87	21.18	14.82	12.71	7.94	5.44	3.63	2.44	2.02	1.06
1.65V	62.37	41.58	31.29	20.79	14.55	12.47	7.80	5.34	3.56	2.39	1.98	1.04
1.70V	61.22	40.81	30.71	20.41	14.28	12.24	7.65	5.24	3.50	2.35	1.94	1.02
1.75V	60.06	40.04	30.13	20.02	14.01	12.01	7.51	5.15	3.43	2.31	1.91	1.00
1.80V	57.75	38.50	28.97	19.25	13.48	11.55	7.22	4.95	3.30	2.22	1.83	0.96

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact U.B.S. UNION BATTERY SERVICE for the latest information.


Le informazioni contenute in questa scheda tecnica sono solo descrittive e indicative, non sono una garanzia. U.B.S. UNION BATTERY SERVICE si riserva il diritto di aggiornarle/modificarle senza preavviso.




ZGL120032

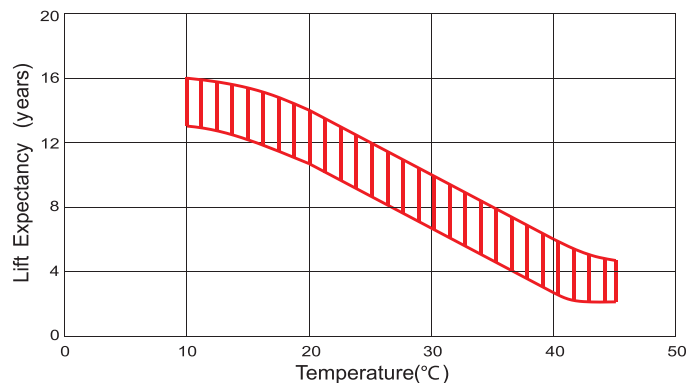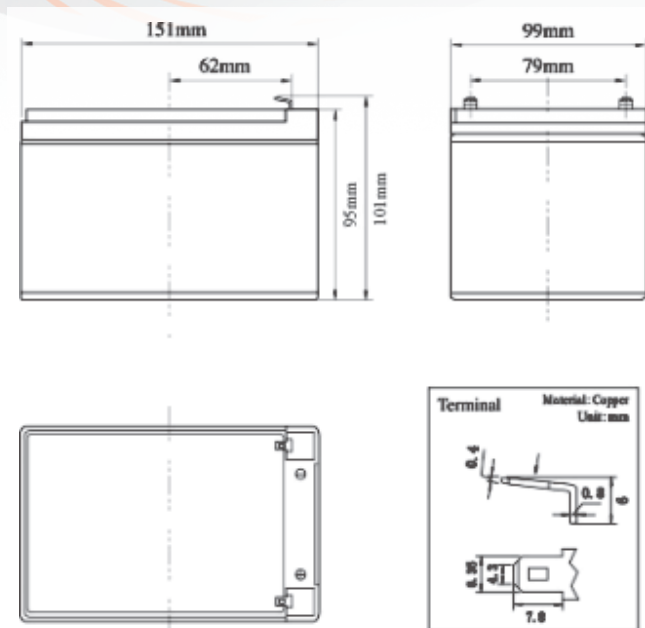


Charging characteristics

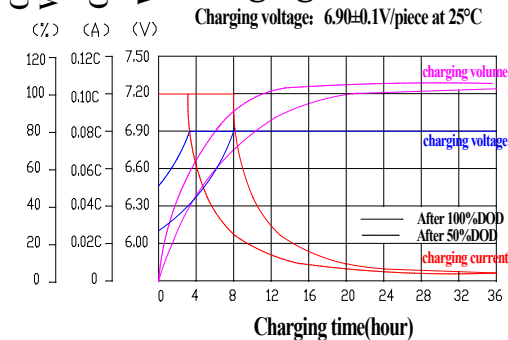

Temperature effect on battery self-discharge

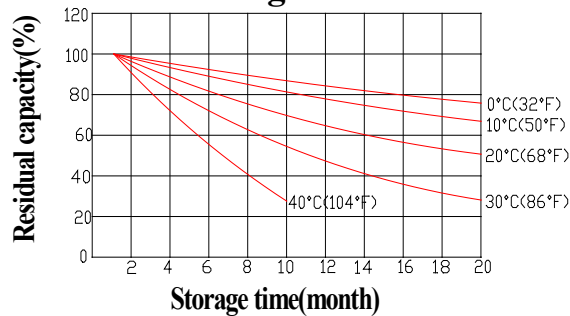

Discharge characteristics (25°C)

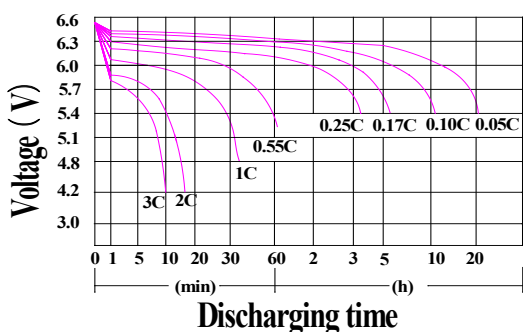

Temperature effect on capacity

