

BATTERIA SIGILLATA AGM DEEP-CYCLE (USO CICLICO)
DEEP-CYCLE AGM MAINTENANCE FREE BATTERY

ZL120115




CHARACTERISTIC / CARATTERISTICHE

| | | |
|--|---------------------------|---------------------------------|
| Volt | | 12V |
| Capacity / Capacità | 20h | 18Ah |
| | 10h | 17Ah |
| | 5h | 16Ah |
| | 2h | 14Ah |
| Internal Resistance | Full Charged Battery 25°C | ≤15mΩ |
| Capacity affected by Temperature / Effetti delle temperature sulla capacità | 40°C | 102% |
| | 25°C | 100% |
| | 0°C | 70% |
| Self-Discharge 25°C Capacity / Autoscarica a 25°C | after 3 month storage | 90% |
| | after 6 month storage | 80% |
| | after 12 month storage | 62% |
| Charge cycle / Ciclo di carica | IU + h | "In" max. 5Amp; "V1" 2.43V/cell |
| | IUIa | |

CHARACTERISTIC / CARATTERISTICHE

| | | | |
|--|-----|--------|-----------|
| Battery dimensions / Dimensioni batteria | | | |
| L/L | W/P | H/A | Tot - H/A |
| 181 | 77 | 167 | 167 |
| Box Dimensions / Dimensioni scatola | | | |
| L/L | W/P | H/A | |
| 353 | 186 | 345 | |
| Weight / Peso | | 5,7 Kg | |
| Terminal / Terminali | | M5 | |
| Case / Contenitore | | ABS | |
| Pallet Qt | | 128 | |

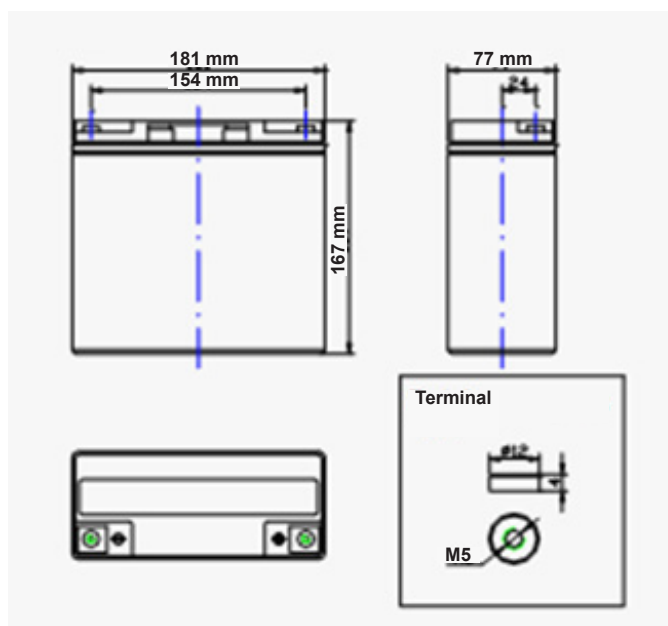

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact U.B.S. UNION BATTERY SERVICE for the latest information.

Le informazioni contenute in questa scheda tecnica sono solo descrittive e indicative, non sono una garanzia. U.B.S. UNION BATTERY SERVICE si riserva il diritto di aggiornarle/modificarle senza preavviso.




www.unionbatteryservice.it

BATTERIA SIGILLATA AGM DEEP-CYCLE (USO CICLICO)
DEEP-CYCLE AGM MAINTENANCE FREE BATTERY


ZL120115




Charge Cycles (25°C)

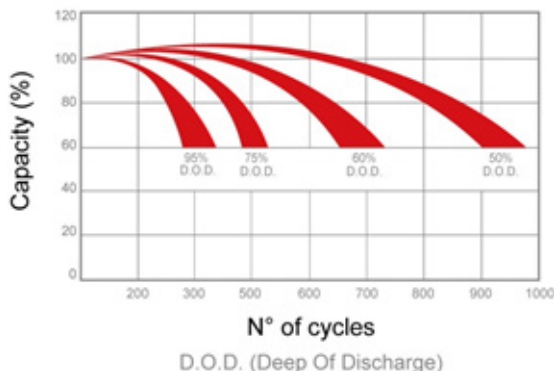

Temperature effect on capacity

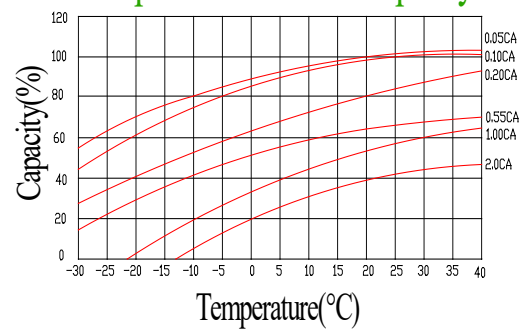

Charge cycle for sealed batteries (GEL/AGM): IU + holding

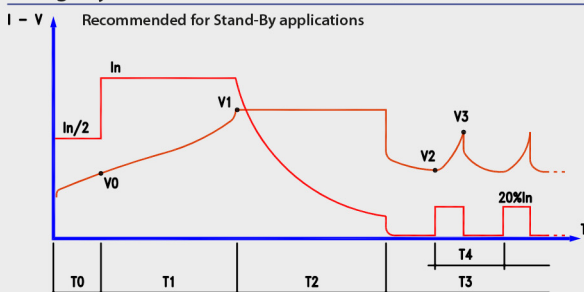

- In = PROGRAMMED CAPACITY/10
- V0 = 1,90 V/CELL
- V1 = PROGRAMMED VALUE
- V2 = 2.10 V/CELL
- V3 = 2.30 V/CELL
- T0 = MAX. 1 HR
- T1 = MAX. 12 HRS
- T2 = T1 (MIN. 2-MAX. 5 HRS)
- T3 = UNLIMITED

This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact U.B.S. UNION BATTERY SERVICE for the latest information.

Le informazioni contenute in questa scheda tecnica sono solo descrittive e indicative, non sono una garanzia. U.B.S. UNION BATTERY SERVICE si riserva il diritto di aggiornarle/modificarle senza preavviso.

